


W-08-23-0885

: 7/8" N
:
:
:
:





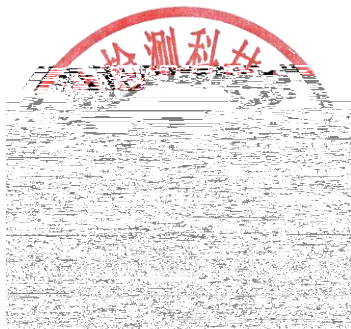

1. 3

2. 3

3. 3

4. 4

 4.1 4

 4.2 4

 4.3 4

 4.4 4

 4.4.1 4

 4.4.2 5

5. 5

 5.1 5

 5.2 6⁸7

 5.3 6

 5.3 7⁸

6. 7

 6.1 7

 6.1.1 cut-of 7

 6.1.2 7

 6.2 8

 6.2.1 cut-of 8

 6.2.2 8

 6.3 8

7. 8

 7.1 9

 7.2 10

 7.2.1 10

 7.2.2 10

 7.3 10

8. 11

5.3



1.

7/8" N

"

"





4.

4.1





4.4.2



2022 1 1 2022 12 31 2022
105

*
*
*
*
*
*
*

1 4

1

	NML7/8M. 00. 01-HPb55-3/-HX	3	25.6	g
	NML1/2H. 00. 03-HPb55-3/-HX	3	6.6	g
	NML7/8F. 07. 04-HPb55-3/-HX	3	32.85	g
	NML7/8K. 03. 04-HPb55-3/-HX	3	7.4	g



W-08-23-0885

6

11





Ecoinvent 3

IPCC 2006

2019

()

2

2022 10

2022

5.3

5 Ecoinvent 3-allocation at point of substitution- unit

Diesel, burned in building machine {GLO} processing APOS, U
Diesel, low-sulfur {RoW} diesel production, low-sulfur, petroleum refinery operation APOS, U
Hard coal {CN} hard coal mine operation and hard coal preparation APOS, U
Heat, district or industrial, other than natural gas {RoW} heat production, at hard coal industrial furnace 1-10MW APOS, U
Pig iron {RoW} pig iron production APOS, U
Transport, freight, lorry 3.5-7.5 metric ton, EURO5 {RoW} transport, freight, lorry 3.5-7.5 metric ton, EURO5 APOS, U

6.

6.1

1%
0.05%
5%

6.1.1

cut-of

0.25m 120

0.05%

6.1.2



2022 1 1 2022 12 31

6.2

0.5%



6.2.1

cut-of

6.2.2



7.1

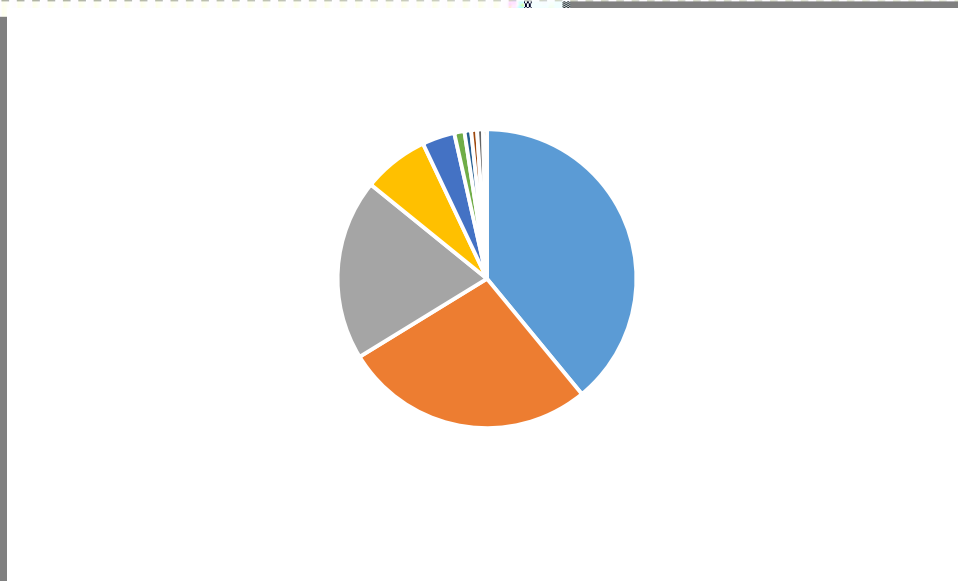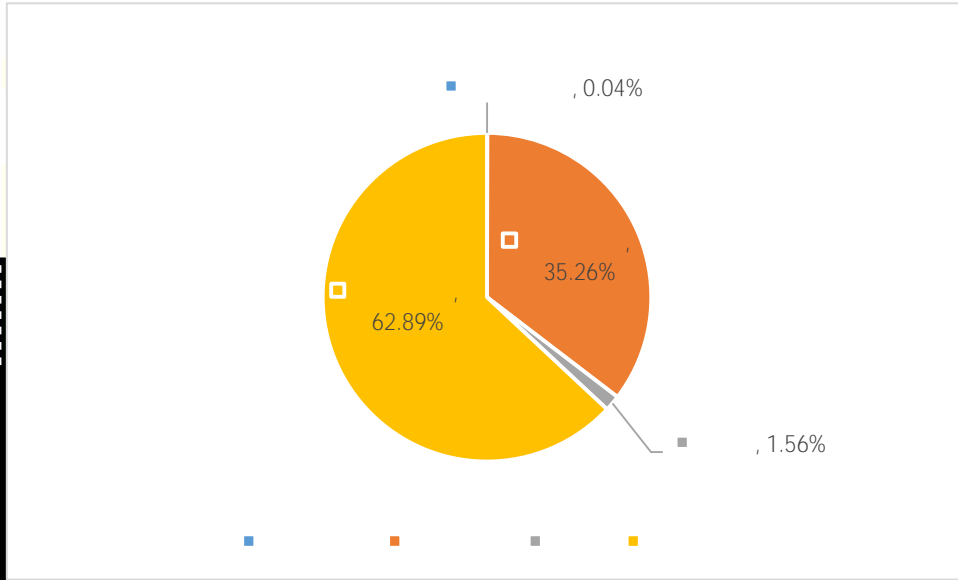



7.2

7.2.1

cut-of

7.2.2

IPCC 2021 GWP100 V1.01

3

-

GWP100



2023

=

8



8.1

8.2

8.3

8.4

